

S HENZHEN SUNSON TECH CO.,LTD

6 Floor,Block D,Chiwan Industrial Zone,
No.1 ShaodiRd.,Shekou,Nanshan District, Shenzhen,
Guangdong, China

Tel:86-755-26470676, Fax :86-755-26470674

Home pages: www.sunsoninput.com

SPC295A

Metal Keyboard Specification

A

X

X

SPC295A Metal keyboard, Old model no. was SPC-2R

Dimensions:

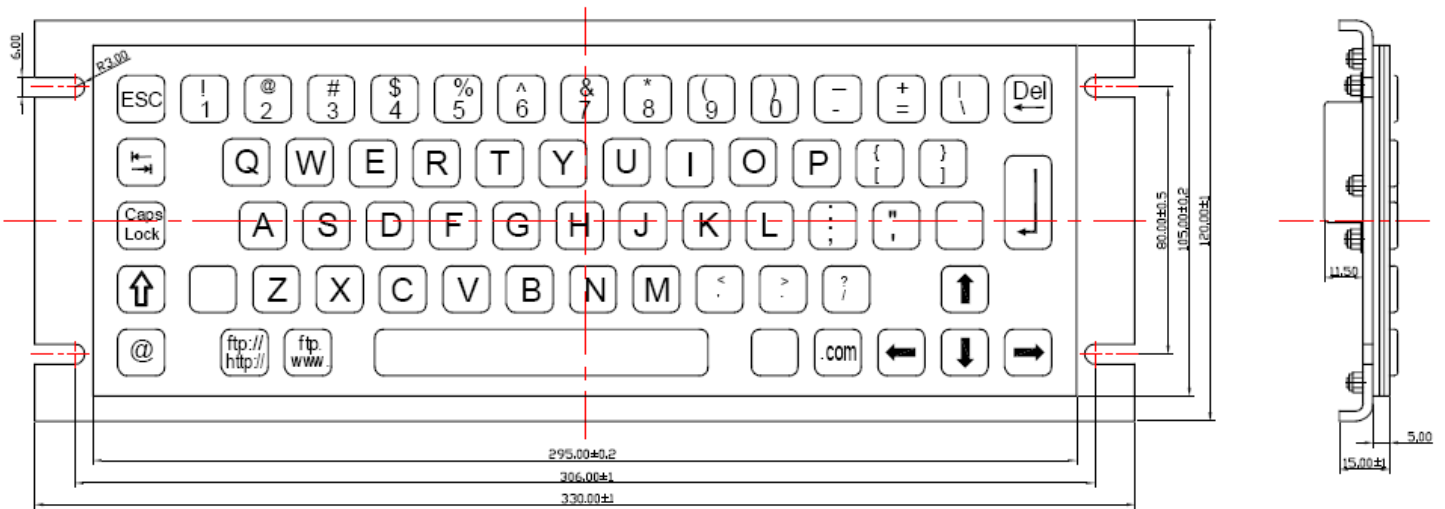


Image for true product



General Specification

SPC295A stainless steel keyboard is suitable for a number of harsh and public access environments such as self-service kiosks, public access kiosks and industrial process control.

A wide range of models are available with combinations of full-QWERTY and numeric keypad. Other hardware options include tracker balls and pointing devices. PIN pad only and trackball only modules are available.

Applications Field:

- Public access applications including self-service kiosks
- Unattended payment solutions and information kiosks
- Industrial control systems including process control

Electric Characteristics

- Power Supply: DC5V+10%
- Communication interface: PS2 or USB
- Power consumption: <0.5W (dynamic), <0.2W(static)

Mechanical characteristics

- Total keys: 64
- Size: 295*105mm
- Weight: 1.0kg
- Key life span: > 2,000,000 times
- Key pressure: 2-3N
- Key travel: 1.00mm
- Key and panel material: high stainless steel
- Key graphics: laser engraved lettering

Environment Adaptability:

Operation temperature range: -25°C~+65°C

Relative humidity range: 30%~90% RH(normal environment)

Storage temperature range: -40°C~+80°C

Relative storage humidity range: 20-95%(non-condensing)

Air pressure: 60-106kPa

Certification

CE,FCC,RoHS

Dimensions

SPC295A

Front plate: W295x D105(mm)

Overall: W330 x D120 x H20(mm)

Gross Weight

1.3KG