

**SHENZHEN SUNSON TECH CO.,LTD**

6 Floor,Block D,Chiwan Industrial Zone,  
No.1 ShaodiRd.,Shekou,Nanshan District, Shenzhen,  
Guangdong, China

Tel:86-755-26470676, Fax :86-755-26470674

Home pages: [www.sunsoninput.com](http://www.sunsoninput.com)

# SPC330AG

# Metal Keyboard Specification

A

X


X

**SPC330AG Metal keyboard**

Image:



**Dimensions:**

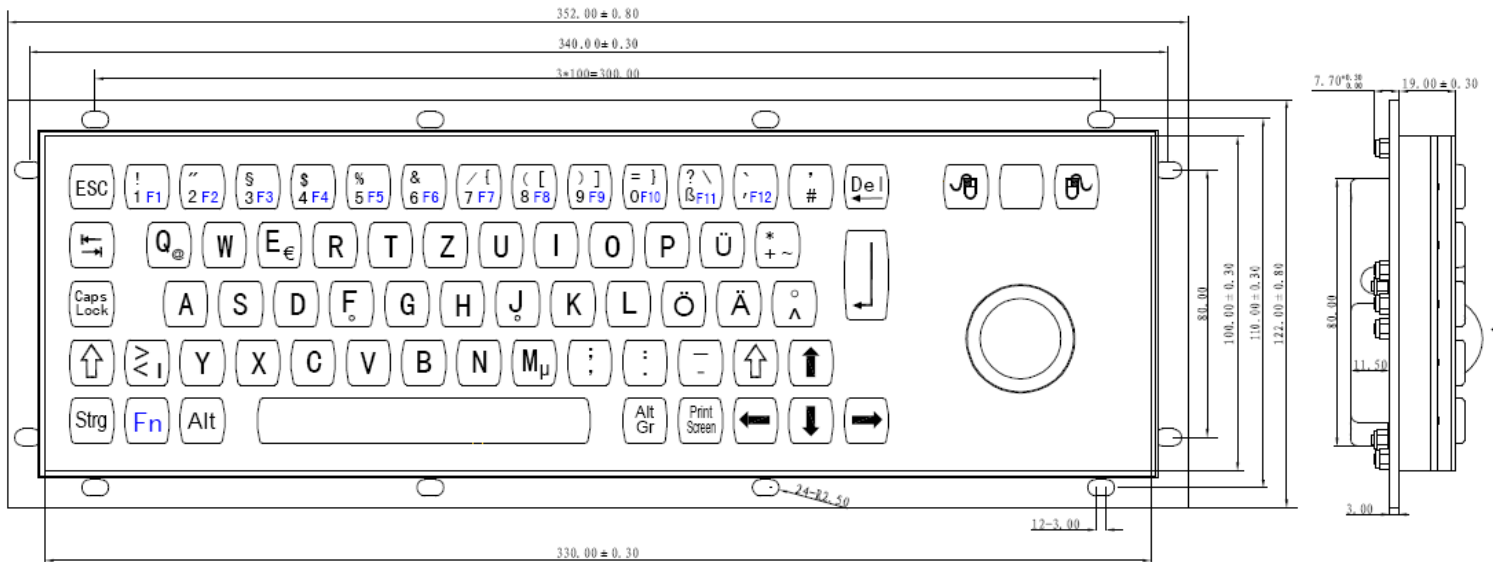

### **General Specification**

SPC330AG stainless steel keyboard is suitable for a number of harsh and public access environments such as self-service kiosks, public access kiosks and industrial process control.

A wide range of models are available with combinations of full-QWERTY and numeric keypad. Other hardware options include tracker balls and pointing devices. PIN pad only and trackball only modules are available.

### **Applications Field:**

- Public access applications including self-service kiosks
- Unattended payment solutions and information kiosks
- Industrial control systems including process control

### **Electric Characteristics**

- Power Supply: DC5V+10%
- Communication interface: PS2 or USB
- Power consumption: <0.5W (dynamic), <0.2W(static)

### **Trackball**

- Diameter: 25 mm
- Material: stainless steel

### **Mechanical characteristics**

- Total keys: 68
- Size: 330\*100mm
- Front panel: Stainless steel
- Bottom panel: PC
- Weight: 1.5kg
- Key life span: > 2,000,000 times
- Key pressure: 2-3N
- Key travel: 1.0mm~1.5mm
- Key and panel material: high stainless steel
- Key graphics: laser engraved lettering

### **Environment Adaptability:**

Operation temperature range: -25°C~+65°C

Relative humidity range: 30%~90% RH(normal environment)

Storage temperature range: -40°C~+85°C

Relative storage humidity range: 20-95%(non-condensing)

Air pressure: 60-106kPa

**Certification**

CE,FCC,RoHS

**Dimensions**

SPC330AG

Front plate: W330 x D100(mm)

Overall: W352 x D33.5(mm). Includes the bakelite addition depth

**Gross Weight**

1.5KG