

SHENZHEN SUNSON TECH CO.,LTD

6 Floor,Block D,Chiwan Industrial Zone,
No.1 ShaodiRd.,Shekou,Nanshan District, Shenzhen,
Guangdong, China

Tel:86-755-26470676, Fax :86-755-26470674

Home pages: www.sunsoninput.com

SPC365AG

**Metal Keyboard
Specification**

A

X


X

SPC365AG Metal keyboard

Image:



Dimensions:

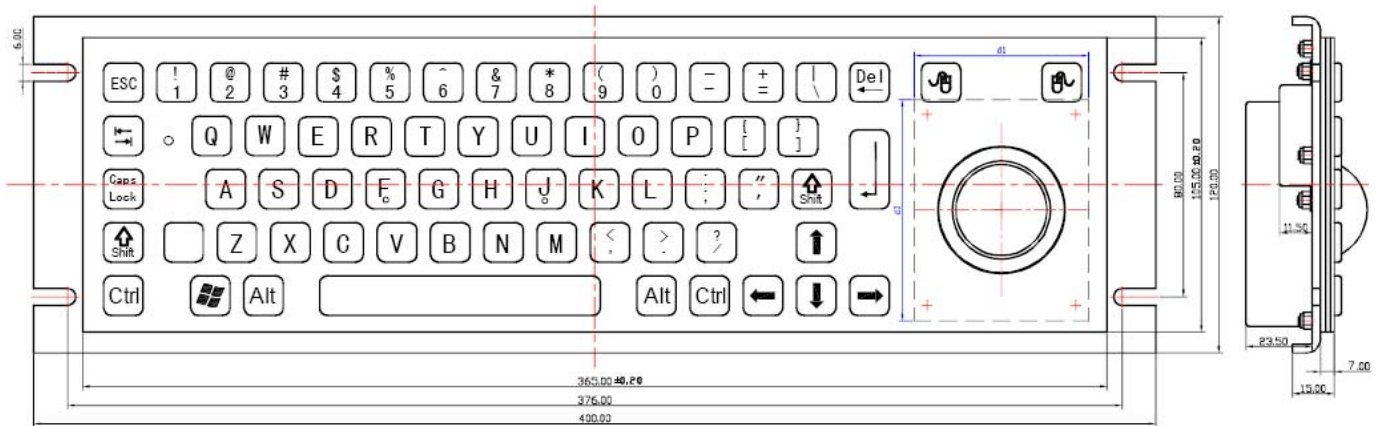

General Specification

SPC365AG stainless steel keyboard is suitable for a number of harsh and public access environments such as self-service kiosks, public access kiosks and industrial process control.

A wide range of models are available with combinations of full-QWERTY and numeric keypad. Other hardware options include tracker balls and pointing devices. PIN pad only and trackball only modules are available.

Applications Field:

- Public access applications including self-service kiosks
- Unattended payment solutions and information kiosks
- Industrial control systems including process control

Electric Characteristics

- Power Supply: DC5V+10%
- Communication interface: PS2 or USB
- Power consumption: <0.5W (dynamic), <0.2W(static)

Trackball

- Diameter: 36 mm
- Material: stainless steel
- Actuation force/trip: 65g / 1.5mm

Mechanical characteristics

- Total keys: 64 + 2 (Mouse keys)
- Size: 365*105mm
- Weight: 1.9kg
- Key life span: > 3,000,000 times
- Key pressure: 2-3N
- Key travel: 1.00~1.50mm
- Key and panel material: high stainless steel
- Key graphics: laser engraved lettering

Environment Adaptability:

Operation temperature range: -25°C ~ +65°C

Relative humidity range: 30%~90% RH(normal environment)

Storage temperature range: -40°C ~ +85°C

Relative storage humidity range: 20-95%(non-condensing)

Air pressure: 60-106kPa

Certification

CE,FCC,RoHS

Dimensions

SPC365AG

Front plate: W365 x D105(mm)

Overall: W400 x D120 x H29(mm)

Gross Weight

1.9KG